

EVO 2 STUDIO

2x1 COLOR-TUNABLE PANEL

EVO is an instrument made to extend your creative possibilities, to set up faster, and to remotely adjust on the fly on any location or any studio.

EVO offers everything you need from a professional color light: industry-leading output-to-weight and output-to-watt ratios, full output from standard 14.4V batteries, wireless control, solid reliability, silent fan-free operation and a weatherproof ergonomic housing.



VE2CST

ORDER CODE

EVO 2 Color STUDIO dustproof + integrated AC power supply + yoke
 INCLUDES: 1x EVO 2 Color Studio LED panel IP51 with DC in XLR-3, integrated AC power supply, DMX in&out XLR-5, Mini-USB, VELVET WIFI Art-Net, 1x RJ45 Ethernet, 1x yoke with Euro28mm junior pin - 16mm baby receiver, 1x PowerCon TRUE1 power cable

VE2CSTNY

ORDER CODE




EVO 2 Color STUDIO dustproof + integrated AC power supply NO Yoke
 INCLUDES: 1x EVO 2 Color Studio LED panel IP51 with DC in XLR-3, integrated AC power supply, DMX in&out XLR-5, Mini-USB, VELVET WIFI ArtNet, 1x RJ45 Ethernet, 1x PowerCon TRUE1 power cable


PHOTOMETRICS 5600K/ 3200K

1m	7000 lux
3ft	650 fc

3m	900 lux
10ft	83 fc

5m	167 lux
16ft	15.5 fc

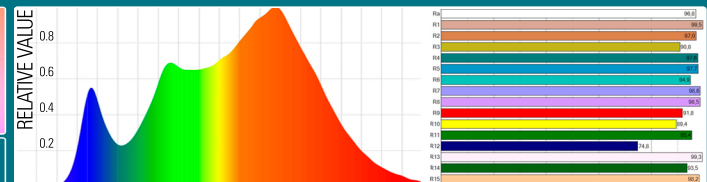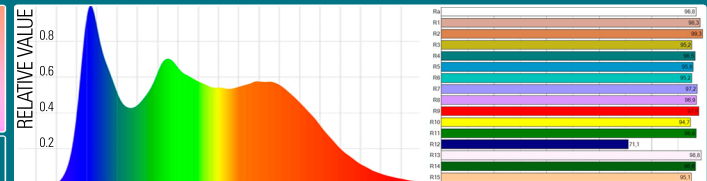

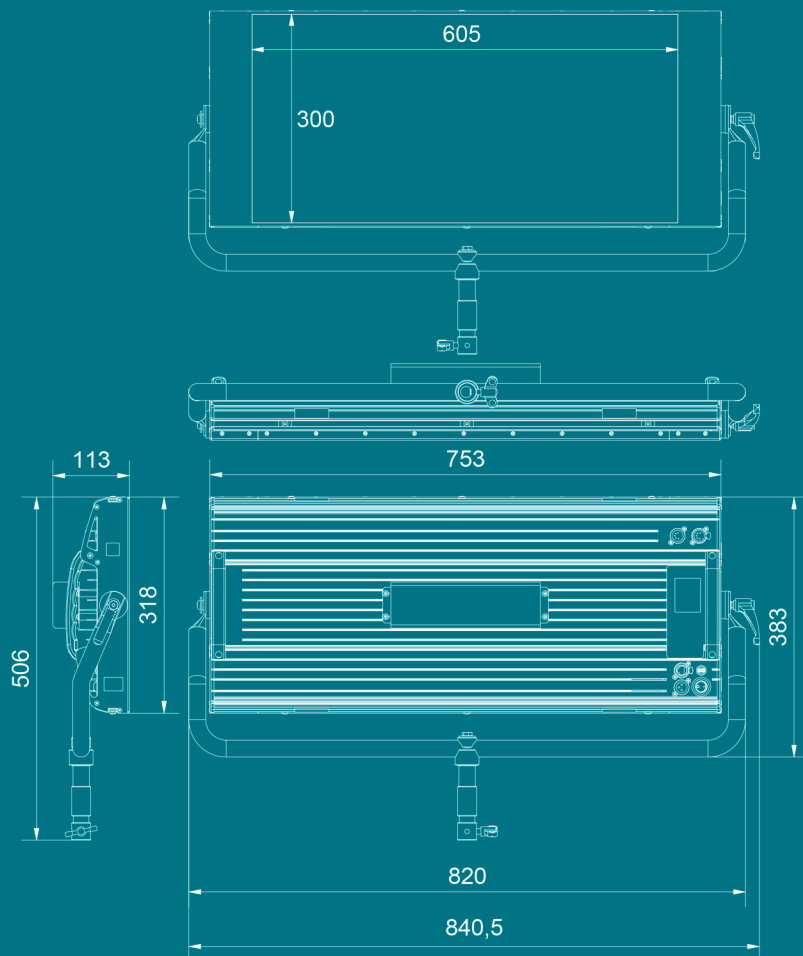

TECHNICAL SPECIFICATIONS

BEAM ANGLE	115°
COLOR TEMPERATURE	Continuously adjustable from 2500K to 10.000K.
LIGHT INTENSITY	Dimmable from 0 to 1000, smooth and flicker-free.
GREEN-MAGENTA	Continuously adjustable from full minusgreen to full plusgreen
COLOR SPECTRUM	Full color spectrum R+G+B+W+CW with hue, saturation, and base color temperature control.
CONTROL COLOR MODES	CCT, HSI+, GEL, RGB+W+CW and EFFECTS modes. Adjustments are laid over a base white light and can be transferred from one mode to another.
CONTROL	Onboard control with color display, DMX/RDM through XLR5, Ethernet Art-Net through RJ-45, Art-Net, Wi-Fi and the VELVET GOYA mobile app.
CR INDEX & TLCI	Exceeds 95 CRI and TLCI.
DIMENSIONS	753 x 318 x 128mm / 29.6 x 12.5 x 5 inches.
PANEL WEIGHT	8.2 kg / 18 lb.
PANEL + YOKE WEIGHT	8.9 kg / 19.6 lb.
POWER 200W	1.8 Amps at 110 VAC.
POWER SUPPLY	90-264V AC 50/60Hz.
LED RATED LIFE	More than 50,000 hours.
COOLING	Silent, fan-free passive cooling.
PROTECTION	Indoor or outdoor IP51 dustproof protected.
CONSTRUCTION & FINISH	Fixture and yoke made of 100% black powdercoated extruded and sheet aluminum.
RIGGING OPTIONS	Aluminum yoke with 16mm baby receptacles combined with 28mm junior pin, multiple ¼"-20 rigging points, double vertical yoke, pole-operated yoke.



Copyright 2019 VELVET. EVO 2 Weatherproof information (product code VE2CIP54 & VE2CIP54NY) is published by THELIGHT S.L.

Technical data and offerings are subject to change without notice. All rights reserved.
VELVET & EVO is a registered trademark by THELIGHT S.L. Carrer de la Cerdanya 11-A 08192 Sant Quirze del Valles. BARCELONA, SPAIN. www.velvetlight.tv